


GX6 EC3 & GX6 EC3 RF

High performance extract fans with EC motors




GX EC3 range of 6" axial fans incorporate long-life, energy-efficient Ultra EC motor technology and feature installer selectable speed settings to satisfy Part F1 installed performances for intermittent ventilation in kitchens or utility rooms. The range includes a single speed extract/intake model and radio frequency (RF) controlled models using innovative wireless RF control technology. Controllers offer a wireless and battery-less control solution using only kinetic energy to generate and send control signals to single or multiple RF fans. This control option reduces installation time and cost as there is no need to run cables between the fan and the controller or purchase batteries.

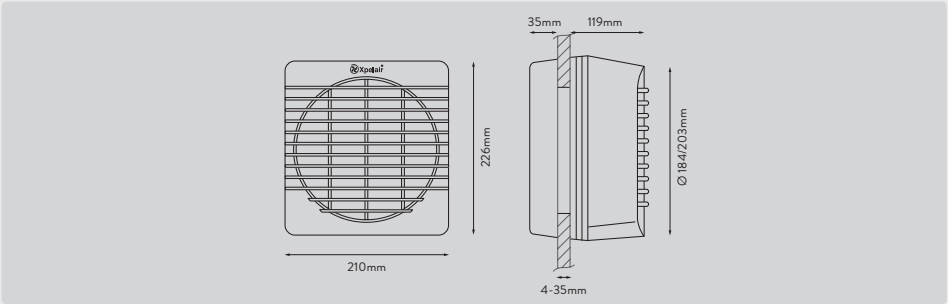

| Product Features | GX6 EC3 | GXC6 EC3 | GX6 EC3R | GX6 EC3 RF | GX6 EC3R RF |
|--------------------------------|---------|----------|----------|------------|-------------|
| Reference Number | 92755AW | 92756AW | 92728AW | 92731AW | 92732AW |
| Standard | ✓ | | ✓ | ✓ | ✓ |
| Pullcord | | ✓ | | | |
| Reversible Intake/Extract | | | ✓ | | ✓ |
| Silent Electro-thermal Shutter | ✓ | | ✓ | ✓ | ✓ |
| RF Controllable | | | | ✓ | ✓ |
| Double Insulated | ✓ | ✓ | ✓ | | |
| Safety Finger Guard | ✓ | ✓ | ✓ | ✓ | ✓ |
| Window Kit Supplied | ✓ | ✓ | ✓ | ✓ | ✓ |

| Product Selector | GX6 EC3 | GXC6 EC3 | GX6 EC3R | GX6 EC3 RF | GX6 EC3R RF |
|---|-----------|-----------|---------------------------|------------|-------------|
| Reference Number | 92755AW | 92756AW | 92728AW | 92731AW | 92732AW |
| Speeds | 2 | 2 | 1 | 2 | 2 |
| Extract Performance (m ³ /h) | 134/255 | 134/255 | Extract 255 Intake 134 | 134/255 | 134/255 |
| Extract Performance (l/s) | 38/71 | 38/71 | 71 | 38/71 | 38/71 |
| Electric Power Rating (W) | 5.6/9.4 | 5.6/9.4 | 9.4 | 5.6/9.4 | 5.6/9.4 |
| Weight (kg) | 1.9 | 1.9 | 1.9 | 1.9 | 1.9 |
| Sound Pressure Level (dBA@3m) | 30.3 | 30.3 | 30.3 | 30.3 | 30.3 |
| Specific Fan Power (W/l/s) | 0.15/0.14 | 0.15/0.14 | 0.14 | 0.15/0.14 | 0.15/0.14 |
| Hole Diameter in Window (mm) | 184 | 184 | 184 | 184 | 184 |
| Hole Diameter using Wall Kit (mm) | 203 | 203 | 203 | 203 | 203 |

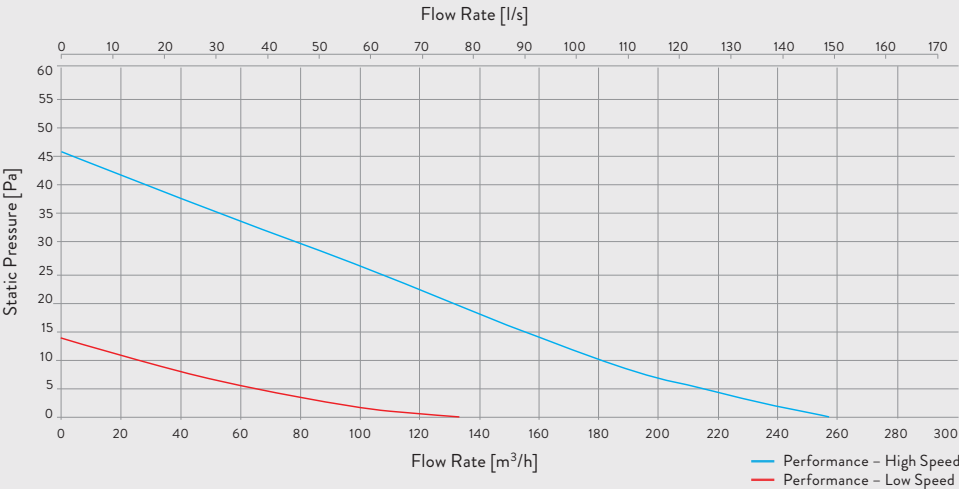

| Product | Low speed | | | | | | | | | | |
|--------------------------------|-----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| Static Pressure (Pa) | 0 | 0.4 | 0.8 | 1.6 | 2.2 | 2.8 | 3.7 | 4.9 | 6.8 | 8.5 | 13.7 |
| Flow Rate in m ³ /h | 134 | 127 | 120 | 112 | 104 | 95 | 85 | 74 | 60 | 43 | 0 |

| Product | High speed | | | | | | | | | | |
|--------------------------------|------------|-----|-----|-----|-----|-----|------|------|------|------|------|
| Static Pressure (Pa) | 0 | 1.5 | 2.7 | 4.9 | 7.3 | 9.5 | 13.1 | 17.5 | 23.3 | 30.3 | 46.3 |
| Flow Rate in m ³ /h | 255 | 242 | 228 | 214 | 198 | 181 | 162 | 140 | 115 | 81 | 0.00 |

