


WX6, WX9 & WX12

Commercial wall fans with ‘safe lock’ metal telescopic wall liner



WX commercial duty wall fans are designed for pubs, restaurants, offices, kitchens, factories, schools and shops, and are suitable for single, cavity brick and timber frame walls. The low profile white fascia is styled to blend in cleanly with commercial surroundings, while on the WX9 and WX12 units a positive plug and socket assembly provides a means of isolation. All WX models come complete with a wall-mounting kit which includes a ‘safe lock’ metal telescopic wall liner.

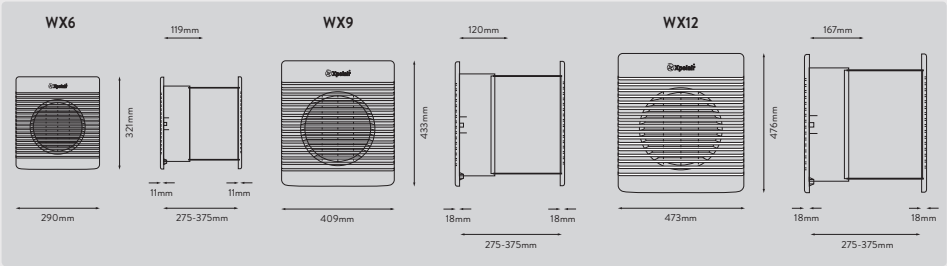

Product Features	WX6	WX6T	WX9	WX12
Reference Number	92502AW	92523AW	92503AW	92504AW
Reference Number (Flame Retardant Materials)			89996AE	
Standard	✓		✓	✓
Timer		✓		
6" Impeller	✓	✓		
9" Impeller			✓	
12" Impeller				✓
Reversible Intake/Extract			✓	✓
Silent Electro-thermal Shutter	✓	✓	✓	✓
Trickle Ventilation Facility	✓	✓	✓	✓
Safety Finger Guard	✓	✓	✓	✓
Metal Telescopic Wall Liner Supplied	✓	✓	✓	✓

Product Selector	WX6	WX6T	WX9	WX12
Reference Number	92502AW	92523AW	92503AW	92504AW
Reference Number (Flame Retardant Materials)			89996AE	
Remote Switch (not supplied)	✓	✓	✓	✓
Integral Adjustable Run-on Timer (2 – 20 mins)		✓		
Extract Only	✓	✓		
Selectable Intake, Extract or Controller Operation			✓	✓
Speeds	1	1	2	2
Extract Performance (m³/h)	205	205	583/684	596/750
Extract Performance (l/s)	57	57	162/190	166/208
Intake Performance (m³/h)			437/477	815/969
Intake Performance (l/s)			121/133	226/269
Sound Pressure Level (dBA@3m)	39	39	47/50	48/54
Electrical Power Rating (W)	34	34	41	85
Hole Diameter (w x h mm)	245 x 268	245 x 268	345 x 375	434 x 434
Wall Thickness (mm)	275 – 375	275 – 375	275 – 375	275 – 375
Weight (kg)	6.4	6.4	10.5	14

