


Simply Silent™ LV100

4"/100mm SELV axial extract fans complete with wall-fitting kit




The Simply Silent™ LV100 (Low Volt) models are designed specifically for safe installation directly in or over the splash area zone 1, offering complete peace of mind. These models are supplied with a 12V SELV transformer, positioned out of reach of any person using the bath or shower. The LV100 range has two speeds, selectable at install.

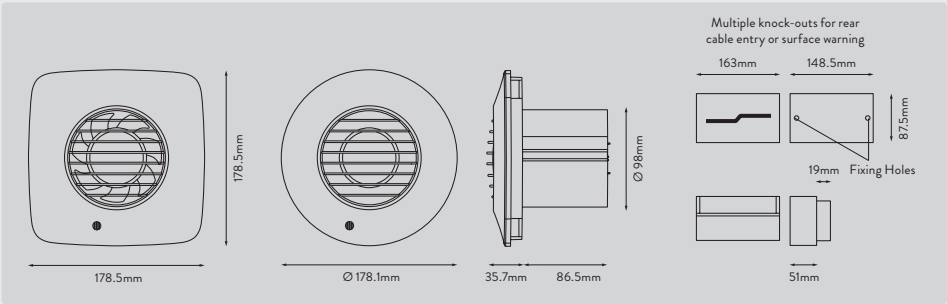

Models		Design	Standard	Timer (Adjustable 30s – 30mins)	Pullcord	Humidistat (50-90% RH)	PIR
With Kit	LV100S	93031AW	■	✓			
	LV100TS	93032AW	■	✓			
	LV100PS	93033AW	■		✓		
	LV100HTS	93034AW	■	✓		✓	
	LV100HPTS	93035AW	■	✓	✓	✓	
	LV100PIRS	93036AW	■				✓
	LV100R	93011AW	●	✓			
	LV100TR	93012AW	●	✓			
	LV100PR	93013AW	●		✓		
	LV100HTR	93014AW	●	✓		✓	
	LV100HPTR	93015AW	●	✓	✓	✓	
	LV100PIRR	93016AW	●				✓

Product Selector	LV100
Speeds	2
Extract Performance (l/s)	16/21
Extract Performance (m ³ /h)	58/74
Electrical Power Rating (W)	5.5/11.8
Specific Fan Power (W/l/s)	0.34/0.58
Sound Pressure Level (dBA@3m)	22/34
IP Rating	IPX4
Motor Type	AC

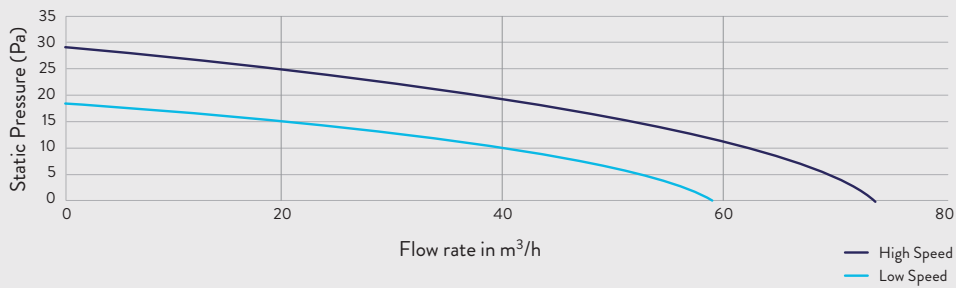

Low Speed												
Static Pressure (Pa)	0	1.8	4.6	5.7	7.4	8.3	10.0	10.8	11.5	11.9	13.1	19.3
Flow Rate in m³/h	57.60	54.79	51.12	48.22	45.14	41.84	38.05	34.06	29.52	24.14	17.12	0.00

High Speed											
Static Pressure (Pa)	0	3.4	7.2	10.8	13.3	15.6	16.2	16.3	16.2	16.5	28.6
Flow Rate in m ³ /h	73.71	70.00	65.76	61.23	56.34	50.98	44.99	38.43	32.76	23.22	0.00

ANCILLARIES
 We recommend the Inside Fit External Wall Kit to allow fuss-free fitting from the inside.



Fold the outer grille.



Push through the wall tube.



Open up the outer grille.



Pull back on the string to secure to the outside wall.