


XIL & XXS

Inline axial extract fan systems for shower cubicles




XIL100 fan systems contain all the components necessary for a normal installation. Including the inline fan, 3m of flexible duct, worm drive clips, inline backdraught shutter, internal white ceiling grille and outside soffit/wall grille. XXS100 fans are available on their own. Humid or moist air will be ducted away via a neat grille installed directly over the shower to the external grille outside, typically in the soffit.

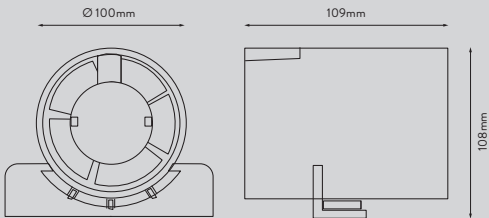


Product Features	XIL100	XIL100T	XXS100	XXS100T
Reference Number	90329AW	90330AW	90331AW	90332AW
Standard	✓		✓	
Timer (adjustable 2 – 20mins)		✓		✓
Shower Fan System Kits	✓	✓		
Fan Only			✓	✓

Product Selector	XIL100	XIL100T	XXS100	XXS100T
Reference Number	90329AW	90330AW	90331AW	90332AW
Electrical Power Rating (W)	29	29	29	29
Extract Performance (fid, m ³ /h)	93	93	93	93
Extract Performance (fid, l/s)	26	26	26	26
Sound Pressure Level (dBA@3m)	30	30	33	33
Duct Diameter (mm)	100	100	100	100
Hole Diameter (mm)	115	115	115	115
IP Rating	IPX2	IPX2	IPX2	IPX2
Weight (kg)	0.9	0.9	0.8	0.8

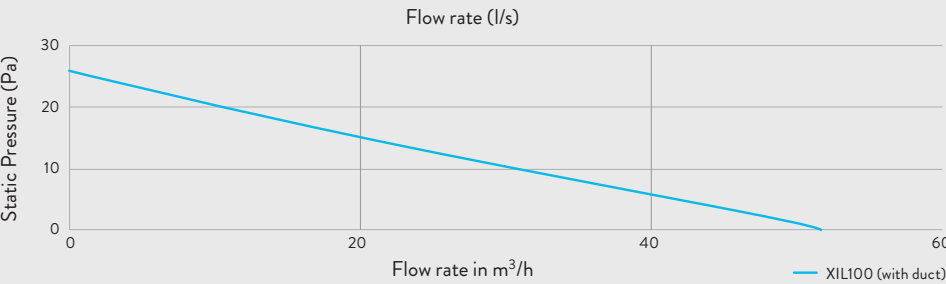

Product	XIL100										
Static Pressure (Pa)	0	2	3.8	5.6	6.2	7.7	10.1	11.7	13	14.1	25.7
Flow Rate in m ³ /h	52.16	49.49	46.67	43.67	40.45	36.94	33.07	28.66	23.44	16.62	0.00

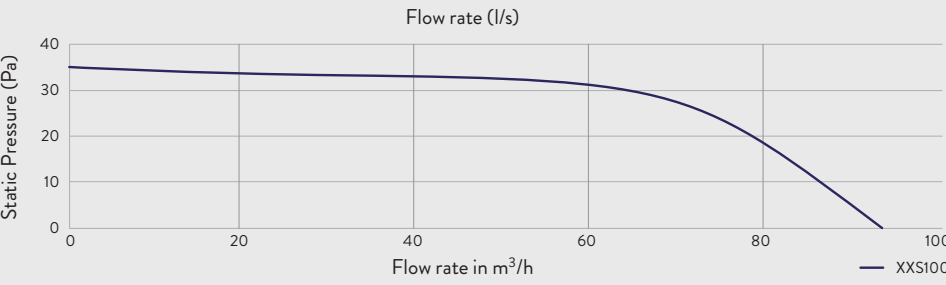

Product	XXS100									
Static Pressure (Pa)	0	8.8	15.5	20.3	27.2	32	33.5	33.8	32.5	34.5
Flow Rate in m ³ /h	93.24	87.28	82.35	77.09	71.43	65.28	58.48	50.74	41.56	0.00