


XSD

Single EC box fans



The XSD EC range of single attenuated inline supply/extract units offer a quiet, compact, high efficiency ventilation solution that maintains indoor air quality.

Incorporating market-leading technologies, XSD has been designed with today's energy costs in mind, minimising energy consumption and reducing associated losses when compared with traditional extract ventilation systems. The units feature onboard Demand Controlled Ventilation (DCV) to ensure optimum indoor air quality, while the acoustically lined case reduces noise levels.

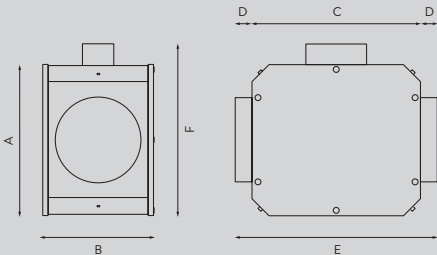

Dimensions (mm)						
Duct Ø	A	B	C	D	E	F
100	300	220	350	40	430	360
125	300	220	350	40	430	360
150	300	220	350	40	430	360
160	300	220	350	40	430	360
200	450	330	500	40	580	510
250	450	330	500	40	580	510
315	640	460	680	65	810	700
400	640	460	680	70	820	700
500	810	580	900	70	1040	870

Product Selector	XSD100	XSD125	XSD150	XSD160	XSD200	XSD250	XSD315	XSD400	XSD500
Reference Number	92890AA	92891AA	92892AA	92893AA	92894AA	92895AA	92896AA	92897AA	92898AA
Spigot Diameter (mm)	100	125	150	160	200	250	315	400	500
Electrical Power Rating (W)	46	46	46	46	80	173	171	463	763
Electrical Current FLC (A)	0.37	0.37	0.37	0.37	0.73	1.45	1.45	2.05	3.35
Motor Insulation Class	○	○	○	○	○	○	○	○	○
Weight (kg)	9.5	9.5	9.0	9.0	17.5	18.0	34.0	36.5	60.0

