## Simply Silent™ Contour C6 6"/150mm axial extract fan range



The Simply Silent™ Contour C6 intermittent extract fan range has been designed to blend seamlessly with the surrounding décor. These fans control humidity, odours and mould growth effectively in kitchens, utility rooms, larger bathrooms and individual offices. The Contour 6 range has two speeds, selectable at install.













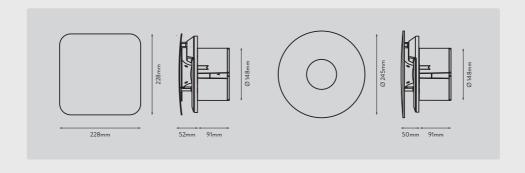

Product Features	C6S	C6TS	C6PS	C6HTS	C6R	C6TR	C6PR	C6HTR
Reference Number	93170AW	93172AW	93174AW	93176AW	93171AW	93173AW	93175AW	93177AW
Design	•	•	•	•	•	•	•	•
Standard	1				1			
Timer		1		1		1		1
Pullcord			1				1	
Humidistat				1				1
Backdraught Shutter	1	1	1	1	1	1	1	1

Product Selector	C6
Speeds	2
Extract Performance (I/s)	54/61
Extract Performance (m³/h)	194/217
Electrical Power Rating (W)	15/22
Specific Fan Power (W/I/s)	0.28/0.36
Sound Pressure Level (dBA@3m)	41/44
IP Rating	IPX4

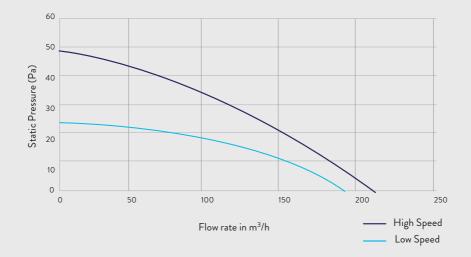

Low Speed				
Static Pressure (Pa)	Flow rate in m <sup>3</sup> /h			
0	193.46			
3.2	182.99			
5.8	172.59			
9.2	161.51			
12.2	149.60			
14.2	136.66			
16.3	122.34			
17.8	106.08			
19.4	86.79			
21.6	61.62			
23.5	0.00			
23.0	1.00			

High Speed				
Static Pressure (Pa)	Flow rate in m <sup>3</sup> /h			
0	218.32			
4.2	208.20			
9.2	196.35			
13	183.73			
16.3	170.17			
19.8	155.44			
23.9	139.14			
29.5	120.64			
35.8	98.68			
42.2	70.05			
48.6	0.00			