


XIMX


Inline mixed flow extract fans for domestic ducted applications




Available in four sizes, the Xpelair XIMX range of plastic mixed flow inline units offers duties for a wide range of ducted applications. The timer models have an adjustable overrun timer of 2 – 30 minutes. All models come complete with a convenient mounting cradle which makes installation or subsequent inspection simple. Plus, the terminal box is easily accessible, simplifying the electrical connection.



XIMX100/100+125 Range

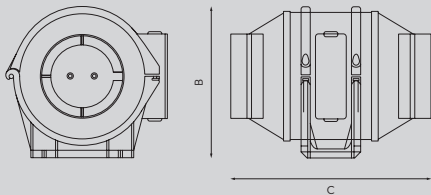

XIMX150/200 Range

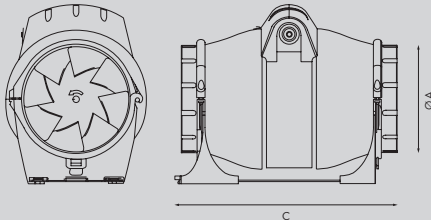

Dimensions (mm)			
Model	ØA	B	C
XIMX100	96	190	246
XIMX100T	96	190	246
XIMX100+	97	226	302.5
XIMX100+T	97	226	302.5
XIMX125	123	190	246
XIMX150	146	250	295
XIMX150T	146	250	295
XIMX200	199	261	295.5

Product Features	XIMX100	XIMX100T	XIMX100+	XIMX100+T	XIMX125	XIMX150	XIMX150T	XIMX200
Reference Number	93078AW	93079AW	93080AW	93081AW	93082AW	93083AW	93084AW	93085AW
Standard	✓		✓		✓	✓		✓
Timer (adjustable 2 – 30mins)		✓		✓			✓	
Integral Mounting Cradle	✓	✓	✓	✓	✓	✓	✓	✓

Product Selector	XIMX100	XIMX100T	XIMX100+	XIMX100+T	XIMX125	XIMX150	XIMX150T	XIMX200
Reference Number	93078AW	93079AW	93080AW	93081AW	93082AW	93083AW	93084AW	93085AW
Speeds	2	2	2	2	2	2	2	2
Extract Performance (m ³ /h)	187/145	187/145	245/180	245/180	280/220	520/405	520/405	1040/830
Extract Performance (l/s)	52/40	52/40	68/50	68/50	78/61	144/113	144/133	289/231
Sound Pressure (dBA@3m)	36/27	36/27	32/27	32/27	37/28	44/33	44/33	52/45
Adjustable Timer		2 – 30 mins		2 – 30 mins			2 – 30 mins	
Duct Size (mm)	100	100	100	100	125	150	150	200
IP Rating	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4

