


GX9 & GX12 CSA 120V 60Hz & 120V 50/60Hz

Commercial AC window fans



GX9 and GX12 window fans have remained a byword for commercial window fans for over 40 years. Supplied with longer ladder strips for ease of installation and with safety finger-guard integrated into the housing and the window grille. Plus, a tamper-proof positive plug and socket assembly provides a means of isolation for service access. Both 9" and 12" models are reversible and feature an enclosed external rotor motor providing constant volume outputs, even in gusty external conditions.

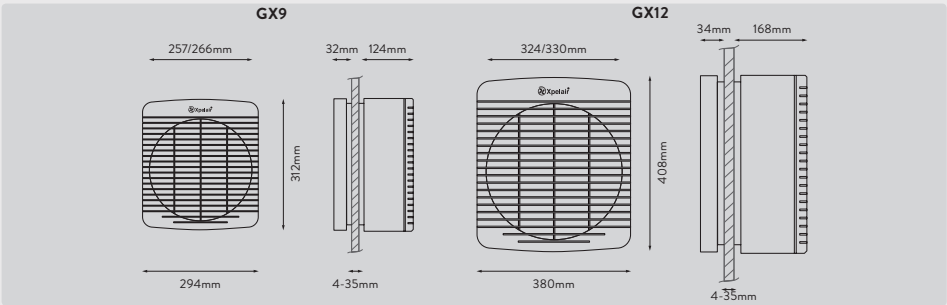


Product Features	GX9 CSA	GXC9 CSA	GX12 CSA	GX9 120V 50/60Hz	GX12 120V 50/60Hz
Reference Number	90195AW	90194AW	90189AW	90906AW	90907AW
Standard	✓		✓	✓	✓
Pullcord		✓			
9" Impeller	✓	✓		✓	
12" Impeller			✓		✓
Reversible Intake/Extract	✓		✓	✓	✓
Silent Electro-thermal Shutter	✓		✓	✓	✓
Safety Finger Guard	✓	✓	✓	✓	✓
Window Kit Supplied	✓	✓	✓	✓	✓

Product Selector	GX9 CSA	GXC9 CSA	GX12 CSA	GX9 120V 50/60Hz	GX12 120V 50/60Hz
Reference Number	90195AW	90194AW	90189AW	90906AW	90907AW
Remote Switch (supplied separately)	✓		✓	✓	✓
Selectable Intake, Extract or Controller Operation	✓		✓	✓	✓
Speeds	2	1	2	2	2
Extract Performance (m ³ /h)	558/725	556	1617/1909	558/725	1617/1909
Extract Performance (l/s)	155/201	154	449/530	155/201	449/530
Intake Performance (m ³ /h)	444/516	-	711/1074	444/516	711/1074
Intake Performance (l/s)	123/143	-	198/298	123/143	198/298
Sound Pressure Level (dBA@3m)	48/50	44	50/55	48/50	50/55
Electrical Power Rating (W)	26-42	22	48-101	26-42	48-101
Hole Diameter (mm)	257	257	324	257	324
Hole Diameter with Wall Liner (mm)	266	266	330	266	330
Weight (kg)	4	3.9	7.9	4	4

GXC9

DOUBLE POLE ISOLATING SWITCH

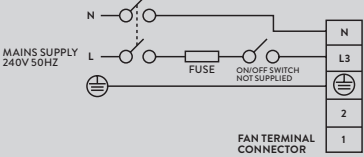

GX9/GX12

DOUBLE POLE ISOLATING SWITCH

