
GX9 & GX12 Commercial AC window fans




GX9 and GX12 window fans have remained a byword for commercial window fans for over 40 years. Supplied with longer ladder strips for ease of installation and with safety finger-guard integrated into the housing and the window grille. Plus, a tamper-proof positive plug and socket assembly provides a means of isolation for service access. Both 9" and 12" models are reversible and feature an enclosed external rotor motor providing constant volume outputs, even in gusty external conditions.




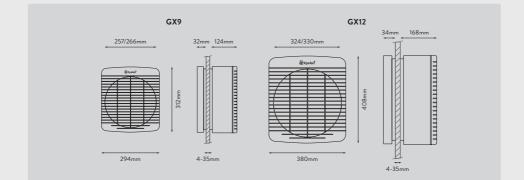

Product Features	GX9	GXC9	GX12
Reference Number	89994AW	89995AW	90012AW
Reference Number (Flame Retardant Materials)	89994AE	89995AE	90012AE
Standard	✓		✓
Pullcord		1	
9" Impeller	✓	✓	
12" Impeller			✓
Reversible Intake/Extract	✓		✓
Silent Electro-thermal Shutter	✓		✓
Safety Finger Guard	✓	1	✓
Window Kit Supplied	✓	1	J.

Product Selector	GX9	GXC9	GX12
Reference Number	89994AW	89995AW	90012AW
Reference Number (Flame Retardant Materials)	89994AE	89995AE	90012AE
Remote Switch (supplied separately)	1		1
Selectable Intake, Extract or Controller Operation	1		1
Speeds	2	1	2
Extract Performance (m ³ /h)	543/636	520	1091/1546
Extract Performance (I/s)	151/177	145	303/429
Intake Performance (m³/h)	405/449		772/1117
Intake Performance (I/s)	113/125		215/310
Sound Pressure Level (dBA@3m)	48/50	44	50/55
Electrical Power Rating (W)	41	32	85
Hole Diameter (mm)	257	257	324
Hole Diameter with Wall Liner (mm)	266	266	330
Weight (kg)	4	3.9	7.9

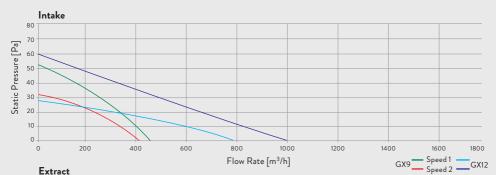

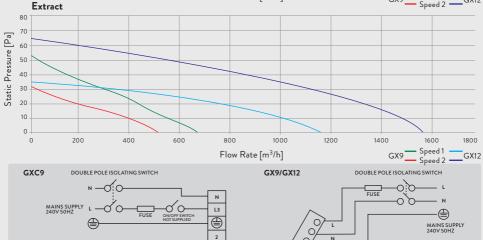

FAN TERMINAL

1

Ν

C

FAN TERMINAL CONNECTOR