


# WX6, WX9 & WX12 CSA 120V 60Hz

## Commercial wall fans.




WX commercial duty wall fans are designed for pubs, restaurants, offices, kitchens, factories, schools and shops, and are suitable for single, cavity brick and timber frame walls. The low profile white fascia is styled to blend in cleanly with commercial surroundings, while on the WX9 and WX12 units a positive plug and socket assembly provides a means of isolation.

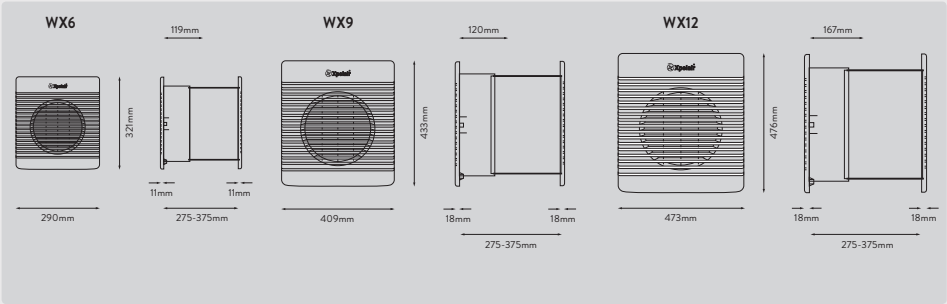


Product Features	WX6 CSA	WX9 CSA	WX12 CSA
Reference Number	90824AW	90193AW	90191AW
Standard	✓	✓	✓
6" Impeller	✓		
9" Impeller		✓	
12" Impeller			✓
Reversible Intake/Extract		✓	✓
Silent Electro-thermal Shutter	✓	✓	✓
Trickle Ventilation Facility	✓	✓	✓
Safety Finger Guard	✓	✓	✓
Plastic Telescopic Wall Liner Supplied	✓	✓	✓

Product Selector	WX6 CSA	WX9 CSA	WX12 CSA
Reference Number	90824AW	90193AW	90191AW
Additional Wall Liner Reference Number		16854AA	16855AA
Remote Switch (not supplied)	✓	✓	✓
Extract Only	✓		
Selectable Intake, Extract or Controller Operation		✓	✓
Speeds	1	2	2
Extract Performance (m <sup>3</sup> /h) high/low	254	611/790	965/1582
Extract Performance (l/s) high/low	71	170/219	268/439
Intake Performance (m <sup>3</sup> /h) high/low	-	462/537	688-1049
Intake Performance (l/s) high/low	-	128/149	191/291
Sound Pressure Level (dBA@3m) high/low	39	47/50	48/54
Electrical Power Rating (W)	23	26-42	48-99
Hole Diameter (w x h mm)	245 x 268	345 x 375	434 x 434
Wall Thickness (mm)	275 – 375	275 – 375	275 – 375
Weight (kg)	2.9	4.7	8.3

**WX6**



**WX6T**



**WX9/WX12**

