


GX6 & GXC6 CSA 120V 60Hz & 120V 50/60Hz

High performance extract fans




Xpelair GX models are purpose designed for use in kitchens and utility rooms and can be window or panel mounted as supplied, or wall mounted using an optional wall kit. GXC models have an integral pullcord actuator.

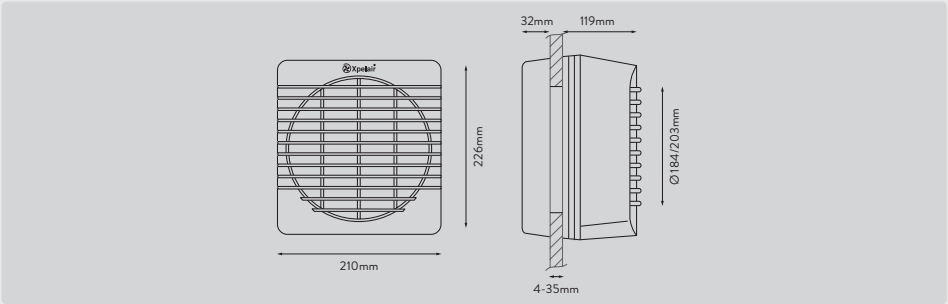

| Product Features | GX6 CSA | GXC6 CSA | GX6 120V 50/60Hz |
|--------------------------------|---------|----------|------------------|
| Reference Number | 90801AW | 90851AW | 90806AW |
| Standard | ✓ | | ✓ |
| Pullcord | | ✓ | |
| Silent Electro-thermal Shutter | ✓ | | ✓ |
| Safety Finger Guard | ✓ | ✓ | ✓ |
| Window Kit Supplied | ✓ | ✓ | ✓ |

| Product Selector | GX6 CSA | GXC6 CSA | GX6 120V 50/60Hz |
|---|---------|----------|------------------|
| Reference Number | 90801AW | 90851AW | 90806AW |
| Speeds | 1 | 1 | 1 |
| Electrical Power Rating (W) | 23.1 | 19.9 | 23.1 |
| Hole Diameter (mm) | 184 | 184 | 184 |
| Hole Diameter with Wall Liner (mm) | 203 | 203 | 203 |
| Weight (kg) | 1.9 | 1.9 | 1.9 |
| Extract Performance (m ³ /h) | 261 | 265 | 261 |
| Extract Performance (l/s) | 73 | 74 | 73 |
| Sound Pressure Level (dBA@3m) | 37 | 37 | 37 |

GX6

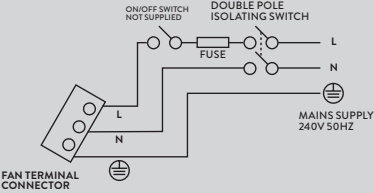

GXC6

