
## GX9/12 EC3 & EC3 RF Commercial long-life, low-energy axial fans



GX9/12 and EC3 commercial axial fans feature Ultra EC motor technology for long-lasting, energy-efficient performance and reduced running costs. For EC3 models an MS2 controller is required, while the new EC3 RF models require the new RF controller, both purchased separately.

The new innovative radio frequency (RF) controllers offer a wireless and battery-less control solution using only kinetic energy to generate and send control signals to single or multiple fans. This control option reduces installation time and cost as there is no need to run cables between the fan and the controller or purchase batteries.




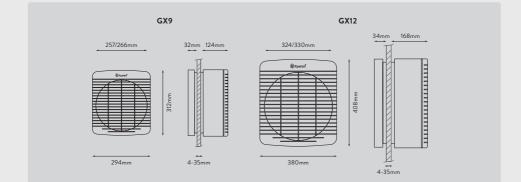

Product Features	GX9 EC3	GX9 EC3 RF	GX12 EC3	GX12 EC3 RF
Reference Number	92729AW	92733AW	92730AW	92734AW
Standard	1	1	1	✓
Silent Electro-thermal Shutter	1	1	1	<i>✓</i>
RF Controllable		1		✓
Double Insulated	1	1	1	<i>✓</i>
Safety Finger Guard	1	1	1	<ul> <li>Image: A set of the set of the</li></ul>
Window Kit Supplied	1	1	1	1

Product Selector	GX9 EC3	GX9 EC3 RF	GX12 EC3	GX12 EC RF
Reference Number	92729AW	92733AW	92730AW	92734AW
Remote Switch (supplied separately)	23513AW (MS2)	92792AW (RF)	23513AW (MS2)	92792AW (RF)
Speeds	5	2	5	2
Passive Intake (shutter open without fan running)		✓		1
Extract Performance (m³/h)	847 Max	372/847	1675 Max	600/1675
Extract Performance (I/s)	235 Max	172/202	448 Max	337/448
Electrical Power Rating (W)	54.8	54.8	67.3	67.3
Hole Diameter (mm)	257	257	324	324
Hole Diameter with Wall Liner (mm)	266	266	330	330
Weight (kg)	4.2	4.2	7.5	7.5





## GX9 EC3/GX12 EC3

