


# Xplus 2 AC

## Multi-point domestic and commercial ventilation unit




The Xplus 2 is a high performing central extract system designed to continuously extract stale, moist air from domestic kitchens, bathrooms and commercial wet rooms. The unit is primarily used in domestic applications but can also be used for commercial applications where continuous extract is required.

The multi-spigot 190mm low-profile design offers the installer greater flexibility when choosing where to site the unit and also due to the spigot configuration, allows ducting to be connected from any direction, therefore reducing airflow restriction and noise. The unit is suitable for either horizontal or vertical installation and has four speed options, three of which are selectable.

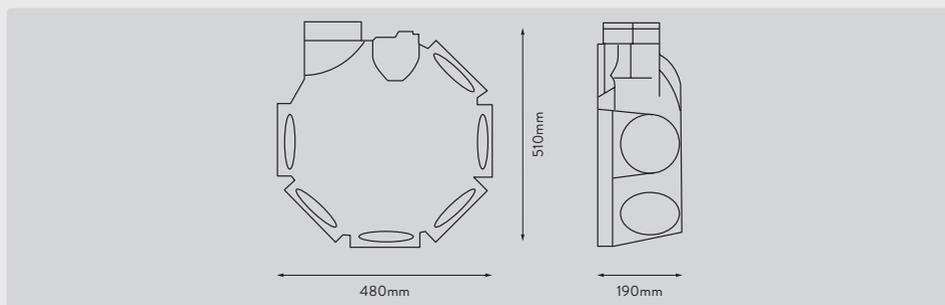

Product Selector	Xplus 2 AC
Reference Number	92430AW
AC Motor	✓
Speeds	4
Extract Performance (FID, m <sup>3</sup> /h)	155/237/329/471
Power (W) Speeds 1/2/3/4	13.4/23.9/35/58
No. of Intake Spigots	6
Spigot Diameter (mm)	125 (80mm adaptors available)
Colour	Blue
Weight (kg)	4.95

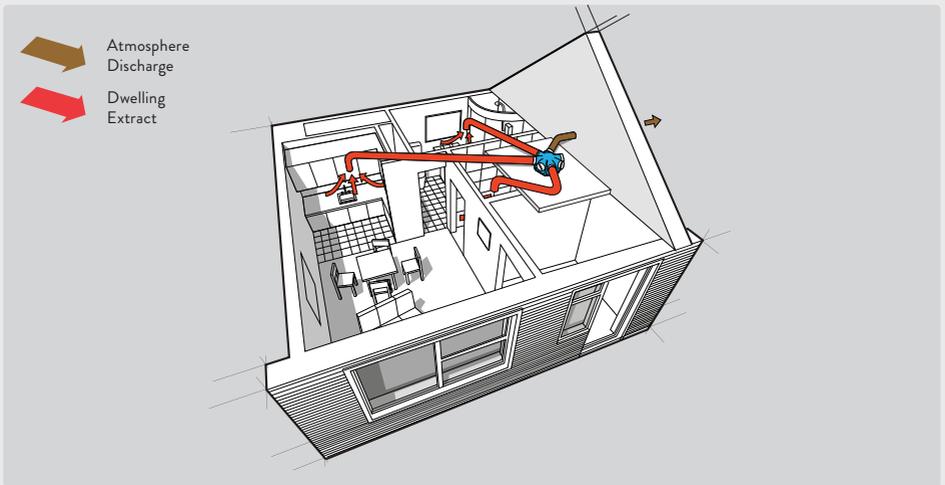

### Trickle

Static Pressure (pa)	Flow (m <sup>3</sup> /h)	Power (W)	SFP
0	115.59	12.4	0.386
3.2	109.65	12.1	0.397
6.8	103.37	12.1	0.421
11.4	96.69	12.2	0.454
15.8	89.51	12.2	0.491
20.1	81.72	12.3	0.542
28	73.10	12.3	0.606
32.3	63.32	12.3	0.699
41.4	51.72	12.4	0.863
54.9	36.61	12.6	1.239

### Boost

Static Pressure (pa)	Flow (m <sup>3</sup> /h)	Power (W)	SFP
0	388.85	60.69	0.561
32	367.35	60.7	0.595
66	346.43	60.6	0.630
101	324.15	60.3	0.670
138	300.21	60.2	0.722
180	274.18	59.7	0.784
217	245.37	58.6	0.860
258	212.66	57.3	0.970
303	173.84	55.8	1.156
358	123.21	53.4	1.560