


Simply Silent™ DX150

6"/150mm axial extract fan range




The Simply Silent™ DX150 intermittent extract fan range is designed for those looking for something conventional, with a modern twist. These fans control humidity, odours and mould growth effectively in kitchens, utility rooms, larger bathrooms and individual offices. Suitable for both wall and ceiling fitting. The DX150 range has two speeds, selectable at install.

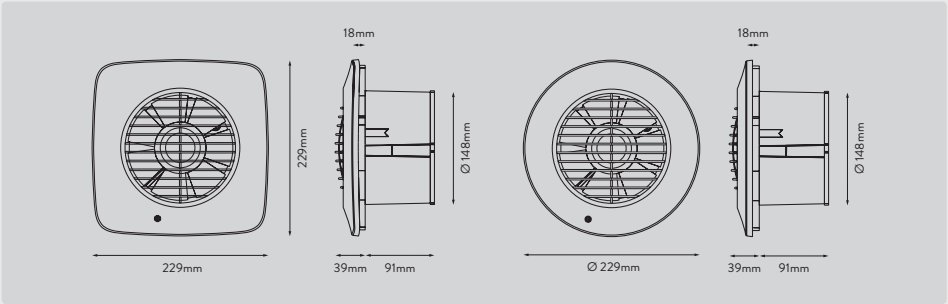


Product Features	DX150S	DX150TS	DX150PS	DX150HTS	DX150R	DX150TR	DX150PR	DX150HTR
Reference Number	93070AW	93072AW	93074AW	93076AW	93071AW	93073AW	93075AW	93077AW
Design	■	■	■	■	●	●	●	●
Standard	✓				✓			
Timer (adjustable 30s – 30mins)		✓		✓		✓		✓
Pullcord			✓				✓	
Humidistat				✓				✓
Backdraught Shutter	✓	✓	✓	✓	✓	✓	✓	✓

Product Selector	DX150
Speeds	2
Extract Performance (l/s)	60/67
Extract Performance (m ³ /h)	214/241
Electrical Power Rating (W)	15/22.6
Specific Fan Power (SFP) (W/l/s)	0.25/0.34
Sound Pressure Level (dBA@3m)	39/42
IP Rating	IPX4

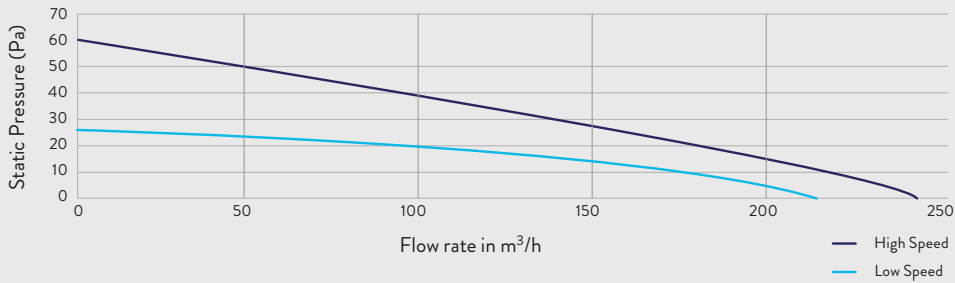

Low Speed	
Static Pressure (Pa)	Flow rate in m³/h
0	213.66
2.6	203.27
5.4	191.70
8	179.38
11.5	166.15
13.6	151.76
16.3	135.85
18.3	117.79
20.2	96.36
21.3	68.40
25.3	0.00

High Speed	
Static Pressure (Pa)	Flow rate in m³/h
0	241.10
5.5	228.76
9.8	215.72
14.5	201.85
18.3	186.94
22	170.74
25.1	152.82
29.3	132.49
35	108.37
42.2	76.90
59.6	0.00

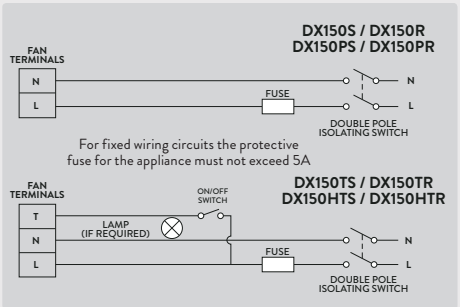

ANCILLARIES

We recommend the Inside Fit External Wall Kit to allow fuss-free fitting from the inside.



Fold the outer grille.



Push through the wall tube.



Open up the outer grille.



Pull back on the string to secure to the outside wall.