

Simply Silent™ G6


6"/150mm axial extract fans with window-fitting kit




The Simply Silent™ G6 intermittent extract fan range has been designed to blend seamlessly with the surrounding décor. It comes complete with a window kit, and once the 184mm diameter hole has been cut into the window, the G6 can simply be installed from the inside using only three screws.

These fans control humidity, odours and mould growth effectively in kitchens, utility rooms, larger bathrooms and individual offices. Discover the beauty of silence. Available in square or round, the sleek, smooth, interchangeable fascia will suit all applications and design preferences. You won't even know it's there.

The G6 range has two speeds, selectable at install.

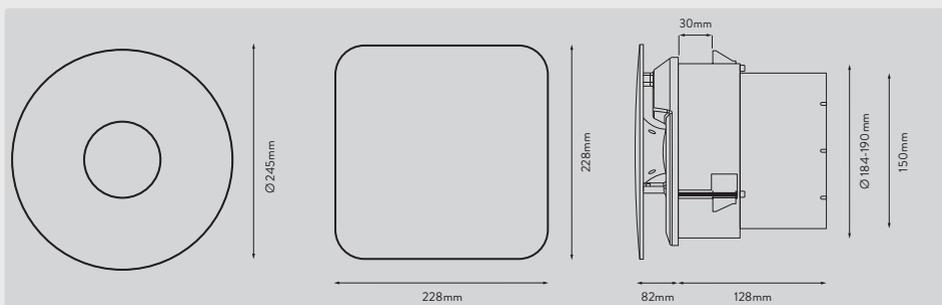

Product Features	G6S	G6R
Reference Number	93193AW	93194AW
Design	■	●
Electronic Backdraught Shutter	✓	✓
Window Installation Kit included	✓	✓

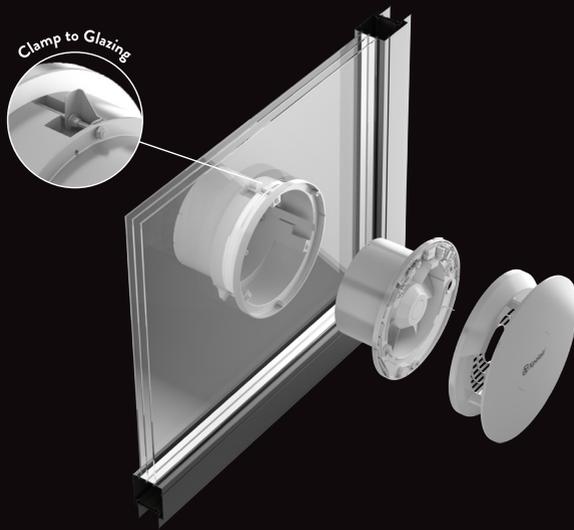

Product Selector	G6
Speed	2
Extract Performance (l/s)	54/61
Extract Performance (m ³ /h)	186/203
Electrical Power Rating (W)	18.3/25.3
Specific Fan Power (SFP) (W/l/s)	0.34/0.42
Sound Pressure Level (dBA@3m)	42/45
IP Rating	IPX4

Low Speed	
Static Pressure (Pa)	Flow rate in m ³ /h
0	186.12
2.4	178.10
5.3	167.97
8	157.18
10.2	145.60
12.8	133.00
15.9	119.07
18	103.25
19.3	84.47
22.2	59.98
25.6	0.00

High Speed	
Static Pressure (Pa)	Flow rate in m ³ /h
0	203.06
4	192.69
8	181.73
11.9	170.06
15.5	157.52
19.8	143.89
25.3	128.81
30.9	111.69
36.5	91.38
43.2	64.87
49.3	0.00

