


Simply Silent™ Shower Fans

4"/100mm near-silent axial extract fan and installation kit




Combining low noise levels with high extraction power, Simply Silent™ Shower Fans are purpose-designed for in-shower installation. They carry out direct extraction right at the point of humidity for a steam-free bathroom environment. In fact, an installed Simply Silent™ Shower Fan achieves an 88% improved extraction rate over comparable in-line shower fans and meets building regulations at installed performance.

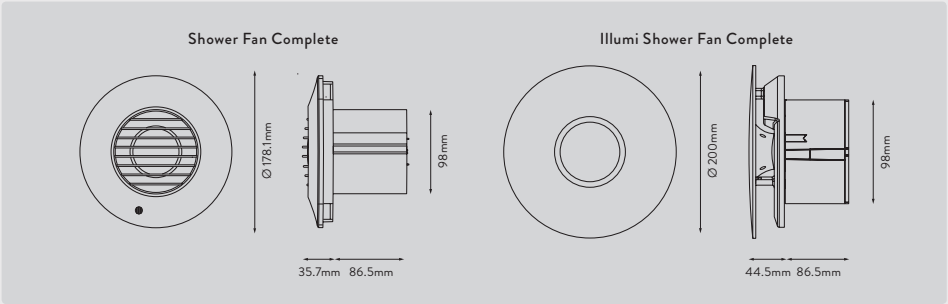


Product Features	Shower Fan Complete	Illumi Shower Fan Complete
Reference Number	93086AW	93087AW
Design	●	●
Timer	✓	✓
Grille Cover	✓	
Baffle Cover		✓
Integrated LED Light		✓
SELV Transformer		✓
Ceiling Fitting Kit Supplied	✓	✓

Product Selector	Shower Fan Complete	Illumi Shower Fan Complete
Reference Number	93086AW	93087AW
Speeds	1	1
Electrical Power Rating (W)	7.7	12.2 (Fan only) 15 (Fan & Light)
Extract Performance (l/s)	21 (15 installed)	21 (15 installed)
Extract Performance (m ³ /h)	76 (54 installed)	76 (54 installed)
Specific Fan Power (SFP) (W/l/s)	0.37	0.58
Sound Pressure Level (dBA@3m)	34	29
IP Rating	IPX4	IPX4
LED Type		Warm White
Lumens		207

Shower fan + Illumi shower fan FID

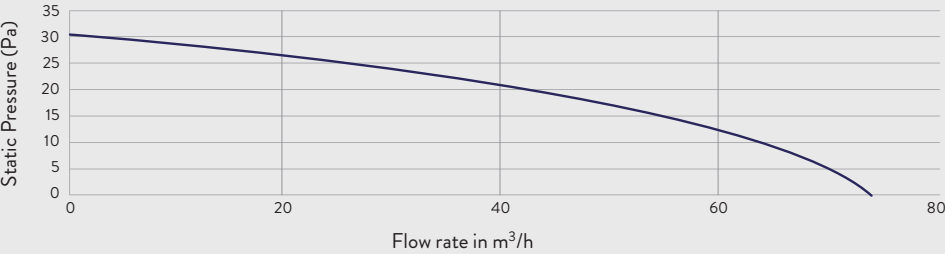

Shower fan + Illumi fan (installed with 3m duct)

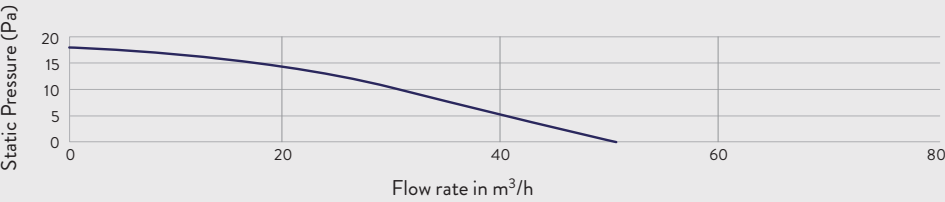

Shower Fan + Illumi Shower Fan (installed)	
Static Pressure (Pa)	Flow rate in m ³ /h
0	51.09
1.4	47.95
2.9	45.22
4.8	42.31
6	39.19
7.8	35.79
9	32.04
12.1	27.77
14	22.71
16.6	16.11
18.4	0.00

