


Premier DX400 & CF40

Centrifugal extract and condensation control fans





The Premier range of centrifugal fans is designed specifically for domestic applications including bathrooms, shower rooms, toilets and utility rooms where longer duct runs are required. All models have a gloss white casing with a clean and sleek appearance. A two-part casing means Premier fans can be recess or surface mounted.

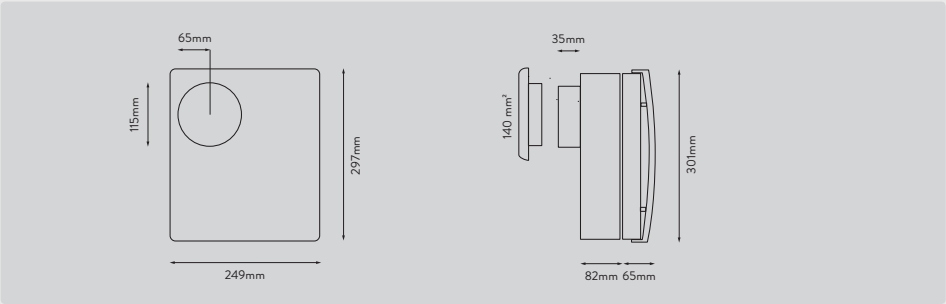


Product Features	DX400	DX400T	DX400PC	CF40	CF40TD	CF40RSTD
Product Codes	91083AW	91084AW	91100AW	91086AW	91087AW	91088AW
Condensation Control			✓	✓	✓	✓
Timer (adjustable 30s – 20m)		✓		✓		
Pullcord (manual override)			✓			
Humidistat			✓	✓	✓	✓
Quick Visit Timer Delay (2mins)	✓	✓		✓		
Room Size Selector	✓		✓	✓		

Product Selector		DX400	DX400T	DX400PC	CF40	CF40TD	CF40RSTD
Product Codes		91083AW	90184AW	91100AW	91086AW	91087AW	91077AW
Speeds		2	3	3	5	5	5
Trickle Ventilation Facility			✓	✓	✓	✓	✓
Electrical Power Rating (W)		78	78	78	77	77	77
IP Rating		IPX5	IPX5	IPX5	IPX5	IPX5	IPX5
Weight (kg)		3	3	3	3	3	3
Extract Performance (m³/h)	speed 4	-	-	-	250	250	250
	speed 3	-	-	-	174	174	174
	speed 2	238	238	238	143	143	143
	speed 1	136	136	136	90	90	90
	trickle	-	43	43	61	61	61
Extract Performance (l/s)	speed 4	-	-	-	69	69	69
	speed 3	-	-	-	48	48	48
	speed 2	66	66	66	40	40	40
	speed 1	38	38	38	25	25	25
	trickle	-	12	12	17	17	17
Sound Pressure (dBA@3m)	speed 4	-	-	-	55	55	55
	speed 3	-	-	-	46	46	46
	speed 2	55	55	55	40	40	40
	speed 1	42	42	42	33	33	33
	trickle	-	27	27	27	27	27

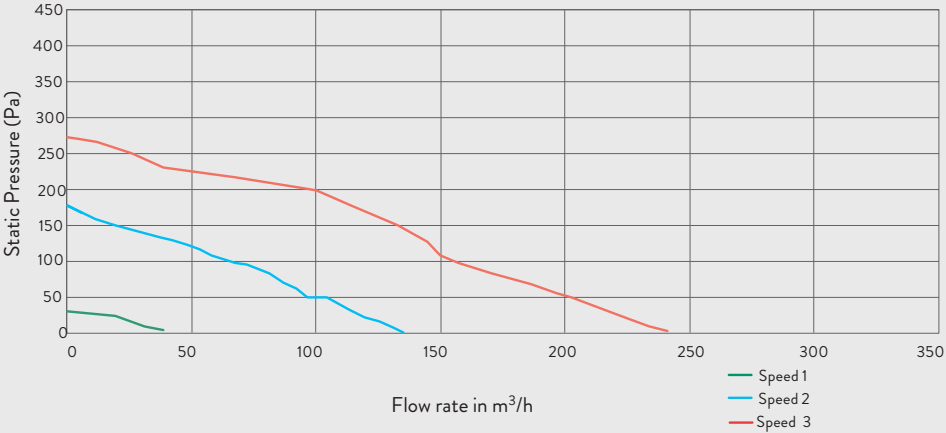


Ceiling Mounting

Hole diameter: 115mm
Ducting size: 100mm




Ducted Applications



Ventilation Shaft Mounting

Hole diameter: 115mm
Ducting size: 100mm



Wall Mounting

Hole diameter: 115mm
Ducting size: 100mm